
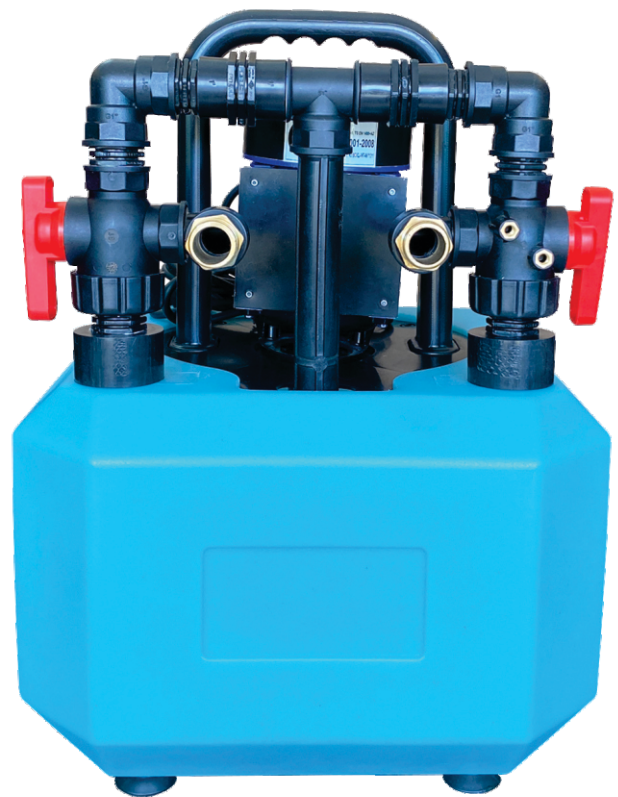





PRATTIK 30 POWERMAX[®]

Effective, Easy Cleaning for Heating Systems

The Kammak PRATTIK 30 POWERMAX descaling pump is designed for safe and easy removal of corrosion debris, sludge and scale from heating systems. It is a professional solution for cleaning heat exchangers, boilers, heating systems, water heaters and plastic injection moulding systems.

- High performance and flow rate
- Light weight and compact with ergonomic design
- Complete with easy-to-use hoses and fittings
- Flow reverser



KAMMAK

High performance
descaling pumps and
flushing compressors

Additional Features

- High flow rate for maximum cleaning
- Flow reversal
- Complete with hoses and fittings
- Rapid removal of system debris
- Ergonomic and compact design

Technical Specification

Pump Type	Vertical axis acid pump
Material of Construction	PE tank
Tank Capacity	30 lt
Dimensions (ØxH)	45cm x 45cm
Weight	13,5 kg
Power Requirements	220-230V, 50Hz single phase motor, Europlug
Motor	600 W / 0.8 HP
Pressure	1 bar
Head	10 m
Flow Rate	150 l/min
Hose	2x2,5m hoses
Max Temperature	60 °C
Degree of protection	Ip54
Connections/fittings	1"



KAMMAK Ltd Şti

Cataltepe Mh BESOB 6. Sok No:9/1 16450 Bursa, TURKEY

Tel: +90 546 223 28 98 www.kammakpumps.com